

AR-008-567^①

DSTO-TR-0029

DISTRIBUTION STATEMENT A

Approved for public release
Distribution Unlimited

Electrostatic Testing of M52A3B1 Primers

H. Billon and L. Redman

DTIC
ELECTE
SEP 09 1994
S B D


APPROVED

FOR PUBLIC RELEASE

AD-A284 421



3078 94-29567

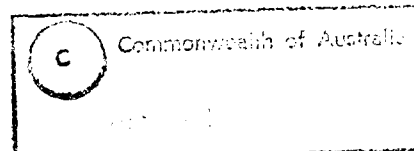

94 8 00 018

DEPARTMENT OF DEFENCE
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION

Electrostatic Testing of M52A3B1 Primers

H.H. Billon and L. Redman

DSTO Technical Report
DSTO-TR-0029

Abstract

Electrostatic sensitivity tests were conducted on M52A3B1 primers using an electrostatic discharge (ESD) gun to simulate human static discharge. The data were analysed by the Bruceton, probit, logit and AMCR techniques. The no-fire threshold (NFT) for electrostatic discharge was determined.

DTIC QUALITY INSPECTED 3

DEPARTMENT OF DEFENCE
DSTO AERONAUTICAL AND MARITIME RESEARCH LABORATORY

Published by

*DSTO Aeronautical and Maritime Research Laboratory
GPO Box 4331
Melbourne Victoria 3001 Australia*

*Telephone: (03) 626 8111
Fax: (03) 626 8999
© Commonwealth of Australia 1994
AR No. 008-567*

APPROVED FOR PUBLIC RELEASE

Authors

H.H. Billon



Horace Billon graduated from Royal Melbourne Institute of Technology with a BSc in Applied Physics. He also has a Graduate Diploma in Mathematical Methods from Royal Melbourne Institute of Technology. After working in the RAAF Quality Assurance Laboratories at Highett he joined MRL in 1986. He works in the Explosives Ordnance Division, and his primary areas of interest are explosives rheology and electrostatics.

L. Redman



Lance Redman attended Royal Melbourne Institute of Technology, graduating with a Diploma of Applied Chemistry in 1971. He worked in the laboratories at Carlton and United Breweries for two years before joining MRL in 1970. At MRL he has gained a wide range of experience in handling explosive materials both primaries, secondaries and pyrotechnics. He is currently working on high velocity impact sensitivity and laser ignition of pyrotechnic compositions.

Accession For	
WIS	<input checked="" type="checkbox"/>
DT	<input type="checkbox"/>
Un	<input type="checkbox"/>
Just	
By	
Date	
Time	
Dist	
A-1	

Contents

1. INTRODUCTION	7
2. EXPERIMENTAL	8
2.1 Materials	8
2.2 Apparatus	8
2.2.1 ESD Simulator and Accessories	8
2.2.2 Mechanical Apparatus	9
2.2.3 Electronics	12
2.2.4 Resistance Measurements	14
2.3 Firing Procedure	14
2.4 Bruceton [5] Procedure	14
2.5 Rundown Procedure	14
3. RESULTS AND DISCUSSION	15
3.1 Bruceton Procedure	15
3.2 Rundown Procedure	15
3.2.1 Probit Analysis	15
3.2.2 AMCR Analysis	16
3.2.3 Logit Analysis	16
3.2.4 Chi-squared Test	16
3.3 Comparison of Test Methods	17
3.4 Comparison with DC Firing Levels	17
3.5 Analysis of CRO Traces	17
4. CONCLUSIONS AND RECOMMENDATIONS	22
5. REFERENCES	22

Electrostatic Testing Of M52A3B1 Primers

1. Introduction

There is considerable concern within the Australian Defence Force (ADF) regarding the inadvertent initiation of electroexplosive devices (EED's). To address the specific problem of electrostatic initiation, MRL has commenced a task the aim of which is to recommend a structured electrostatic discharge protection policy. One of the milestones for this task requires the correlation of the DC and electrostatic sensitivities of EED's.

The DC sensitivity of an EED is the more readily available parameter [1, 2]. Until recently there was no suitable method available for testing EED vulnerability to human static discharge. The US uses the 25 kV test [3] for assessing electrostatic sensitivity but this test does not give an indication of the 0.1% function level or of the no-fire threshold, nor does the test circuitry accurately reproduce worst-case human discharge. We have adequately reproduced human static discharge by using a commercially available electrostatic simulator (the KeyTek ESD-1).

Here we will describe the results of sensitivity tests which were conducted on M52A3B1 conducting composition primers. These primers are used in 20 mm ammunition. Australian weapon systems employing this ammunition are the Phalanx Close-In Weapon System (CIWS) as well as the F111C and F/A-18A aircraft cannon. The purpose of these tests was to determine the electrostatic no-fire threshold voltage and energy for the primer. It would then be possible to compare the electrostatic NFT energy with the NFT energy for DC discharge.

2. Experimental

2.1 Materials

The M52A3B1 primers were provided by the Royal Australian Navy. The primers provided had been filled into cartridge cases - see Figure 1. The projectiles and propellant had been removed from the cartridge cases. The M52A3B1 primer contains a combined priming and conducting mix which is based on lead styphnate and acetylene black.



Figure 1: M52A3B1 primer and associated cartridge case. (Inert primer and bored case).

2.2 Apparatus

2.2.1 ESD Simulator and Accessories

A KeyTek ESD-1 simulator was used in conjunction with a DN-10 discharge network, a HT-10 hand adapter and a DT-4 tool tip (Figure 2). Ground return to the ESD-1 was provided by a GCL-1 lead. The HT-10, DT-4 and DN-10 combination realistically simulates human static discharge via a hand-held metal tool. This combination of hand and metal tool is widely considered to be a worst-case situation [4]. The ESD-1 was powered by a KeyTek PSC-1 supply (the base of

the ESD-1 in Figure 2). The DN-10 possesses a capacitance of 150 pF and a resistance of 330 Ω .

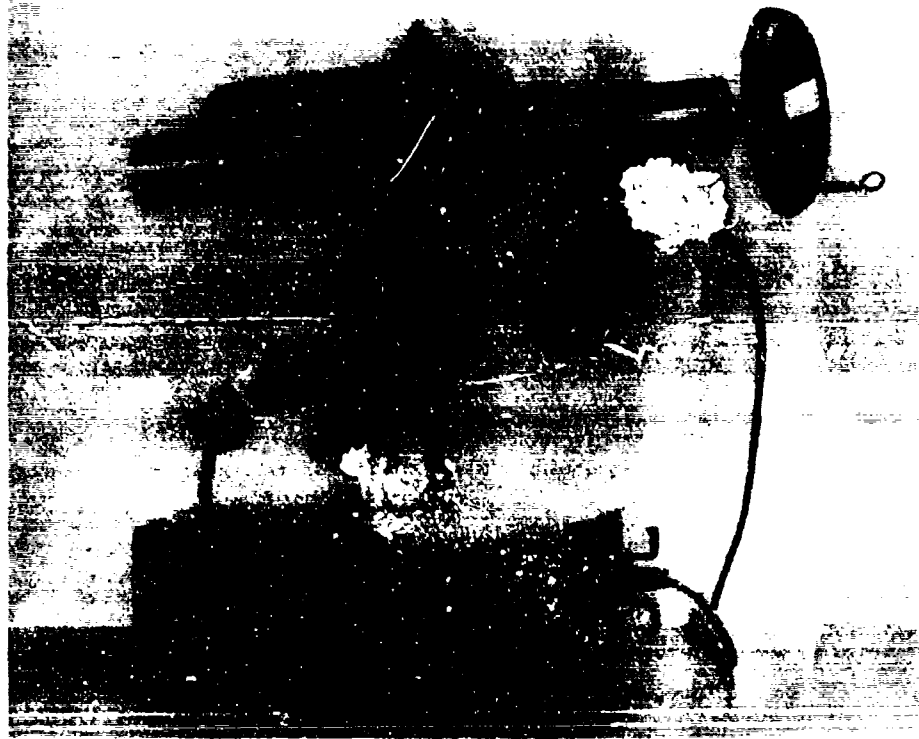


Figure 2: KeyTek ESD-1 electrostatic discharge simulator.

2.2.2 Mechanical Apparatus

The primer and cartridge case were contained in a breech assembly as indicated in Figure 3. The breech assembly was mounted on the motorised turntable as is depicted in Figure 4. The electrode making electrical contact with the primer pole piece (Figure 5) was gold-plated to prevent corrosion during discharge. This gold-plated electrode made contact with the pole piece via a cross-cut spring probe and receptacle. The probe and receptacle were from RS components and could be replaced if they suffered damage from the explosion of the primer. The turntable 'start' position was 55 mm from the 'stop' position, as measured on the turntable periphery. When the turntable reached the 'stop' position, a microswitch was activated to stop the turntable drive motor. The approach speed of the electrode to the DT-4 tip could be varied by changing the voltage setting of the power supply. The same voltage setting of 10 V was used and at this setting the approach speed was found to lie in the range 2.8 mm/s to 2.9 mm/s. The test configuration is depicted in Figure 6.

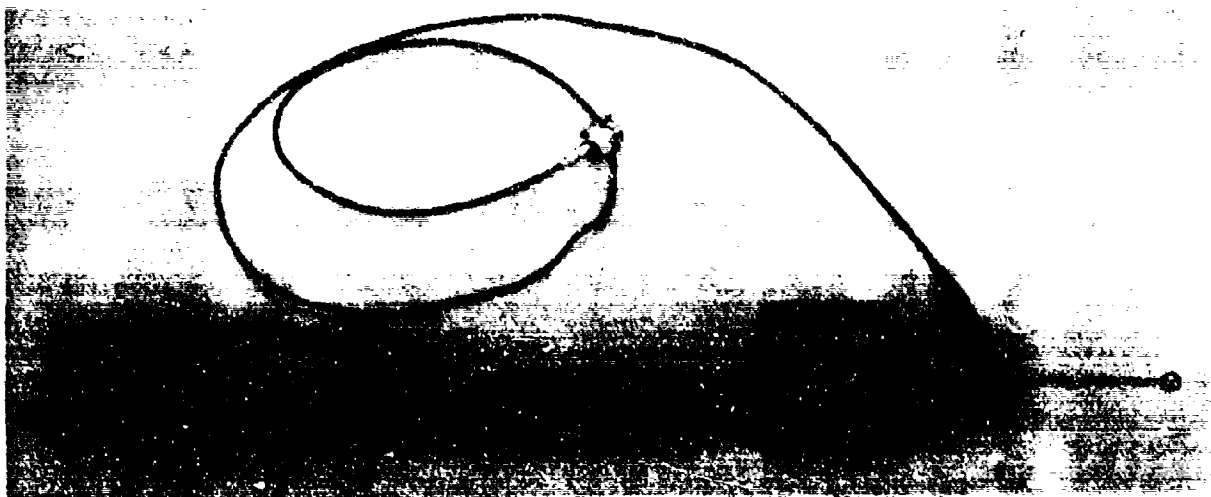


Figure 3: Exploded view of breech assembly and CT-2 current transformer.

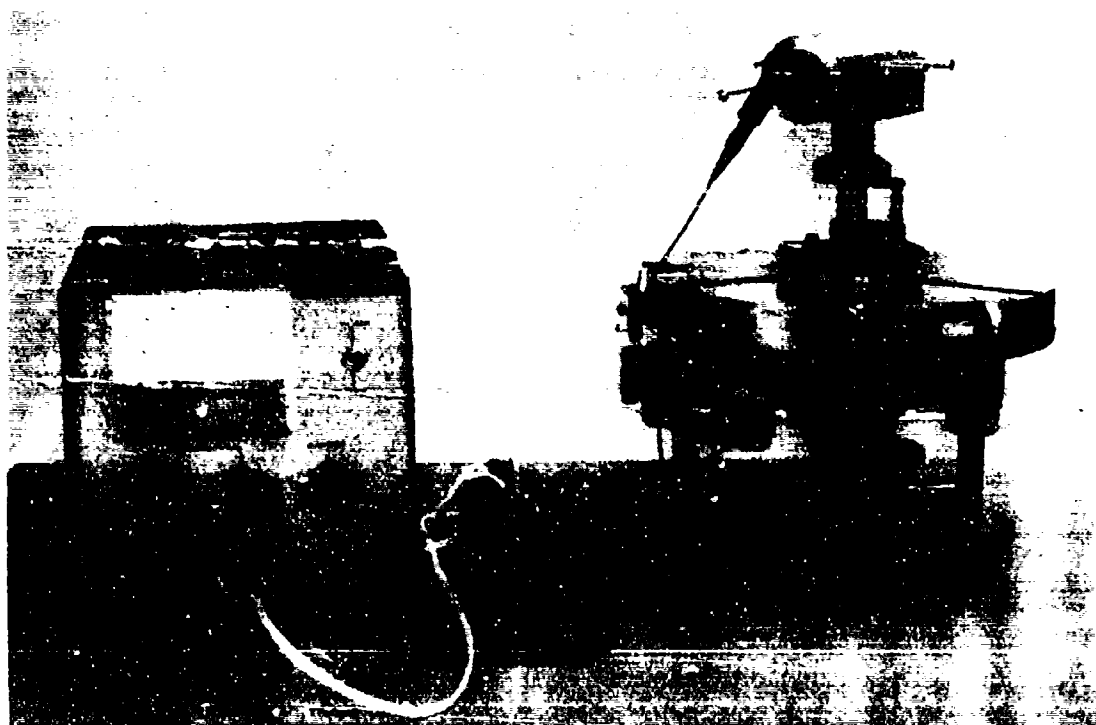


Figure 4: Motorised turntable, switch and associated power supply.



Figure 5: Close up view of DT-4 tip and gold-plated electrode.

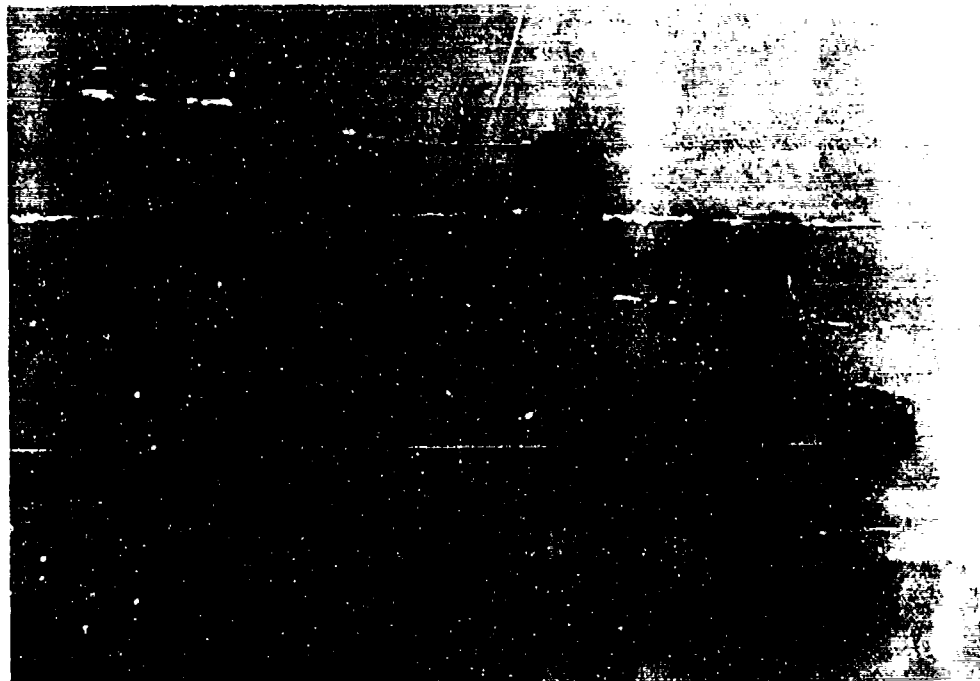


Figure 6: Overall view of ESD-1 simulator and turntable

2.2.3 Electronics

The discharge pulse through the gold-plated electrode was monitored by a Tektronix CT-2 current transformer which has a pulse risetime of about 0.5 ns and an insertion impedance of about $0.04\ \Omega$ shunted by $5\ \mu\text{H}$. The output from the CT-2 was relayed to a Tektronix TEK 7844 oscilloscope (Figure 7) via a Tektronix No. 011-0059-02 attenuator, rated at $50\ \Omega$ and 2 W. This attenuator reduced the output voltage of the CT-2 by a factor of ten.

The TEK 7844 oscilloscope utilised the 7A19 vertical amplifier. The vertical bandwidth for this amplifier-oscilloscope combination is 400 MHz with a risetime of 0.9 ns. The oscilloscope trace was captured by a Tektronix C-51 camera using Polaroid 667 ASA 3000 film. A Tektronix writing speed enhancer (WSEN) was also used to pre-fog the film before discharge.

The entire discharge assembly was enclosed by a safety cabinet with polycarbonate doors (Figure 8). The firing cabinet was lined with earthed aluminium foil to prevent inadvertent electromagnetic pickup of the spark discharge by the oscilloscope. The firing cabinet was linked to an electrically operated exhaust system (Figure 9).



Figure 7: TEK 7844 oscilloscope and C-51 camera.

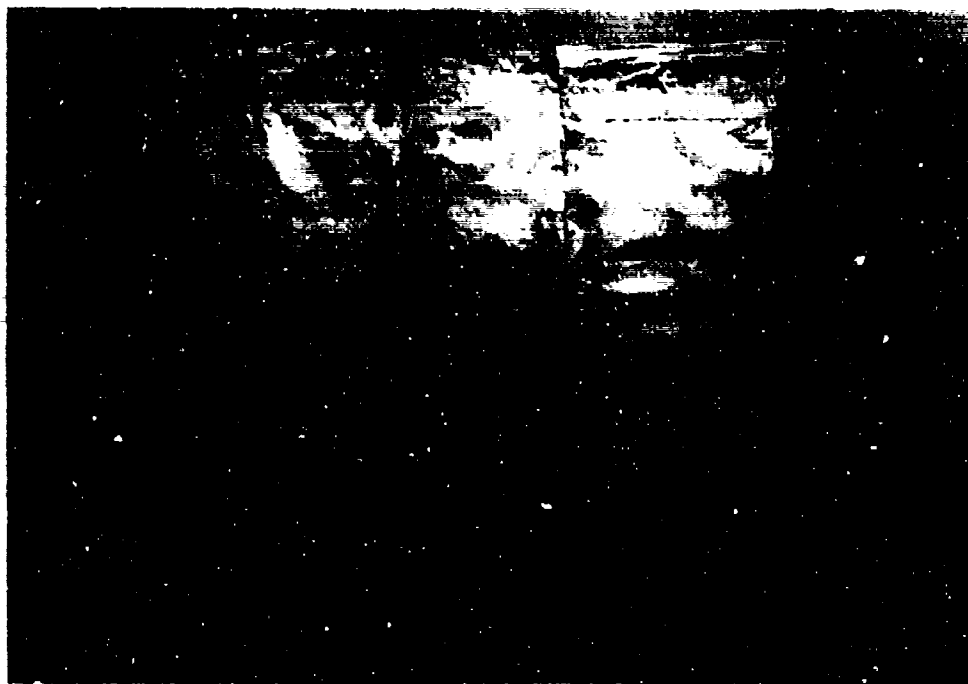


Figure 8: Safety firing box with foil shielding.



Figure 9: Close up of exhaust vent in the firing box.

2.2.4 Resistance Measurements

Primer resistances were measured prior to the ESD tests by means of a Valhalla Scientific 4314AN Digital igniter Tester. Measurements were conducted behind a safety screen.

2.3 Firing Procedure

An initial measurement was made of the primer resistance before the cartridge case was inserted into the breech block (see section 2.2.4). After the cartridge case was inserted into the breech block a second resistance measurement was made between the outer surface of the breech block and the gold-plated electrode. This second measurement was performed to test for electrical continuity.

Upon activation, the turntable brought the gold-plated electrode to a distance of 1 mm from the DT-4 discharge electrode. System alignment was checked at this point. The turntable was returned to the starting position. The ESD-1 was energised and the firing box shut. The turntable was then activated again and it moved the gold-plated electrode to the discharge position. The discharge gap increased with increasing discharge voltage.

All the firings were conducted within the firing cabinet. In the event of a 'no-fire' the primer was disposed of by firing at an elevated voltage. This voltage was generally 15 kV. The exhaust system was used to thoroughly clear the firing cabinet of fumes after each firing.

2.4 Bruceton [5] Procedure

Primers were fired at 2 kilovolt intervals. An estimate was first made of the 50% function level. A primer was then subjected to this voltage. If the primer fired then further primers were tested at successively lower voltages until a 'no-fire' occurred. If a 'no-fire' occurred primers were tested at successively higher voltages until a 'fire' was recorded. This procedure was repeated in an 'up-down' fashion for 20 shots.

2.5 Rundown Procedure

The rundown test consisted of firing separate lots of primers at pre-assigned voltages. The voltage interval was estimated from the Bruceton results. A record was made of the number of 'fires' as well as 'no-fires' which occurred in each lot. This information was then used to estimate distribution parameters. The data were assessed either by the probit [5,6] method, the AMCR [7] method, or by the logit method [6]. The logit method is similar to the probit method but uses a logistic function instead of a normal distribution function.

3. Results and Discussion

3.1 Bruceton Procedure

The results of the Bruceton firings are listed in Table 1. Statistical analysis was conducted by means of a program written by one of the authors [8]. The analysis indicated that the 50 % function level was 3.8 kV. The log mean and standard deviation were 3.5581 and 0.1410, respectively. The Bruceton procedure had been conducted in terms of constant voltage increments. The Bruceton analysis was conducted on the assumption that the voltage sensitivities were log-normally distributed.

3.2 Rundown Procedure

The firing data from the rundown procedure are tabulated in Tables 2 to 10. These data were analysed by using software packages written at MRL [9,10]. As indicated in Table 5 and Table 6, additional firings were conducted at a voltage of 4.2 kV. These additional firings improved the probit and logit fits.

3.2.1 Probit Analysis

A probit analysis of the results was undertaken by means of the software in [9]. The logarithm of the voltage was used as the random variable. Figure 10 is a plot of the logarithms of the voltages against the empirical probits for this analysis. A straight line fit to the data is possible. The results of the analysis may be found in Table 11. The important results are that the 0.1 % function level and no-fire threshold estimates are 1142 V and 799 V, respectively. By assuming that all the energy stored in the discharge network's capacitor is released into the primer, it is possible to estimate the 0.1% FL and NFT energies as 98 μ J and 48 μ J respectively.

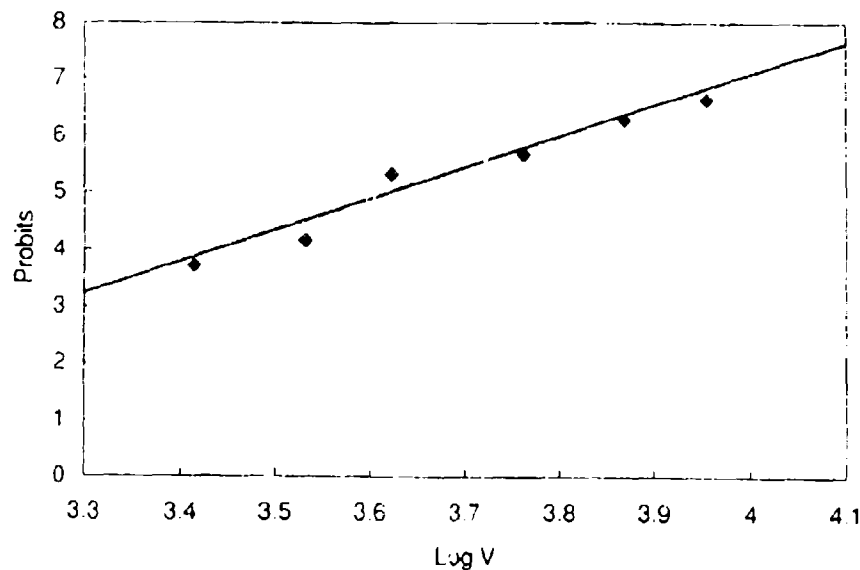


Figure 10: Plot of log voltages against empirical probits. The straight line is the probit regression line.

3.2.2 AMCR Analysis

The AMCR analysis was conducted by means of the software developed in [9]. The AMCR analysis indicated a mean of 6.04 kV with a standard deviation of 2.041 kV. If these values are taken as approximations to the population mean and standard deviation then the 0.1% function level is -0.27 kV. This result is clearly physically impossible.

3.2.3 Logit Analysis

A logit analysis of the results was conducted using software written by one of the authors [10]. The logarithm of the voltage was used as the random variable. A plot of logarithmic voltage against empirical logit is displayed in Figure 11. The 0.1% function level estimate was 781 V. Assuming that the 0.1% FL is normally distributed, the NFT was calculated as 477 V (95% single-sided confidence interval). The 0.1% FL and NFT energies were therefore 46 μ J and 17 μ J, respectively.

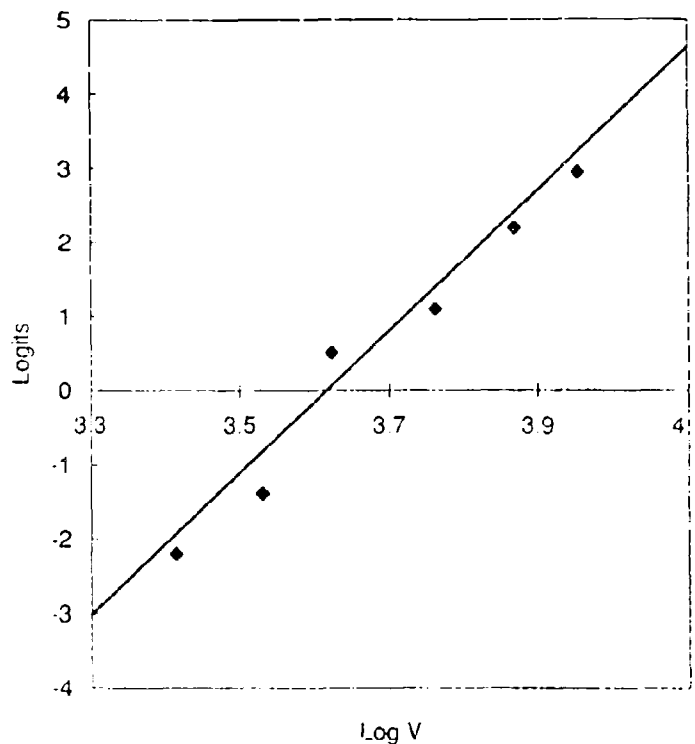


Figure 11: Plot of log voltages against empirical logits. The straight line is the logit regression line.

3.2.4 Chi-squared Test

Chi-squared analyses were conducted on the probit and logit results. For the probit analysis a chi-squared value of $\chi^2 = 3.948$ was found. This value is exceeded in 41% of cases.

A probit line which gives a chi-squared value corresponding to a percentage less than 5% is considered a poor fit and is not the true relationship between percentage fired and (logarithmic) voltage [5]. We conclude that the probit line relating the logarithms of the voltages to the empirical probits is a good fit. Similarly, an analysis was conducted of the logit results. The chi-squared value was $\chi^2 = 3.62$ which is exceeded in 46% of cases. This high percentage indicates that the logit line is also a good fit to the observed firing data.

3.3 Comparison of Test Methods

In the probit analysis of section 3.2.1 it was assumed that the logarithms of the voltage sensitivities were normally distributed. This was also assumed for the Bruceton analysis. The Bruceton method was useful for obtaining rough estimates of the 50% fire level and the level spacing. These initial estimates were used as a basis for the rundown procedure.

There is no reason for favouring the results of either the logit or the probit tests on the basis of the chi-squared analyses. There is obviously a discrepancy between the two methods with respect to the determined 0.1% function levels and no-fire thresholds. This discrepancy is unavoidable because, although both the probit and logit methods provide a good fit to the observed data, the threshold voltage values are obtained by extrapolation. This extrapolation creates uncertainty in the 0.1% FL and NFT determinations.


3.4 Comparison with DC Firing Levels

In sections 3.2.1 and 3.2.3 the NFT energy (0.1% FL, 95% confidence interval) was estimated as 48 μJ and 17 μJ , respectively. The NFT for DC initiation (0.1% FL, 95% confidence interval) is quoted in [11] as 2.2 μJ and in [12] as 5 μJ .

However, it must be remembered that no account has been taken of the effects of the series resistance of the discharge network. Some of the available energy of the storage capacitor will be dissipated by this resistance, reducing the energy discharged into the primer. The magnitude of this lost energy is a function of the primer resistance and this is expected to vary after discharge commences and prior to initiation. Some of the available energy is also dissipated in the spark resistance.

3.5 Analysis of CRO Traces

Representative photographs of the CRO traces may be found in Figure 12. From analysis of the CRO traces it was found that the pulse width was less than about 0.1 ms which is less than 0.1 times the thermal time constant of the M52A3B1 primer (160 μs [11]). This means we are justified in using the energy (rather than the power) to characterise these primers. (The thermal time constant characterises the temperature rise of the EED on application of an electrical stimulus).

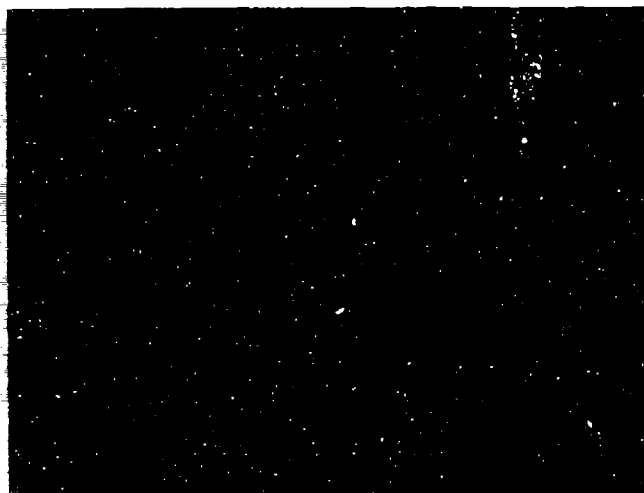

(a)




(b)

Figure 12: Representative photographs of CRO traces. The resistances are the primer resistances measured before insertion of the cartridge case in the breech block. The voltages are the test voltages. (a) Resistance = 20.4 k Ω . Voltage = 1 kV. (b) Resistance = 22.3 k Ω . Voltage = 2.6 kV. (c) Resistance = 27.5 k Ω . Voltage = 3.4 kV. (d) Resistance = 6.5 k Ω . Voltage = 4.2 kV. (e) Resistance = 57.5 k Ω . Voltage = 5.8 kV. (f) Resistance = 30.8 k Ω . Voltage = 7.4 kV. (g) Resistance = 23.2 k Ω . Voltage = 9 kV. (h) Resistance = 15.4 k Ω . Voltage = 10.6 kV.



(c)

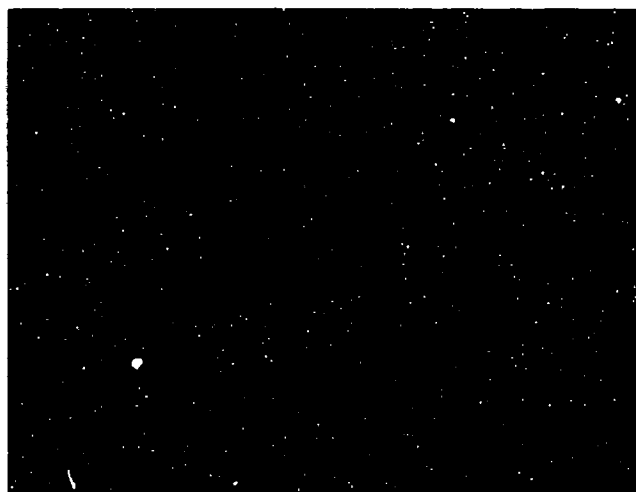

(d)

Figure 12 (Contd): Representative photographs of CRO traces. The resistances are the primer resistances measured before insertion of the cartridge case in the breech block. The voltages are the test voltages. (a) Resistance = 20.4 k Ω . Voltage = 1 kV. (b) Resistance = 22.3 k Ω . Voltage = 2.6 kV. (c) Resistance = 27.5 k Ω . Voltage = 3.4 kV. (d) Resistance = 6.5 k Ω . Voltage = 4.2 kV. (e) Resistance = 57.5 k Ω . Voltage = 5.8 kV. (f) Resistance = 30.8 k Ω . Voltage = 7.4 kV. (g) Resistance = 23.2 k Ω . Voltage = 9 kV. (h) Resistance = 15.4 k Ω . Voltage = 10.6 kV.




(e)



(f)

Figure 12 (Contd): Representative photographs of CRO traces. The resistances are the primer resistances measured before insertion of the cartridge case in the breech block. The voltages are the test voltages. (a) Resistance = 20.4 k Ω . Voltage = 1 kV. (b) Resistance = 22.3 k Ω . Voltage = 2.6 kV. (c) Resistance = 27.5 k Ω . Voltage = 3.4 kV. (d) Resistance = 6.5 k Ω . Voltage = 4.2 kV. (e) Resistance = 57.5 k Ω . Voltage = 5.8 kV. (f) Resistance = 30.8 k Ω . Voltage = 7.4 kV. (g) Resistance = 23.2 k Ω . Voltage = 9 kV. (h) Resistance = 15.4 k Ω . Voltage = 10.6 kV.

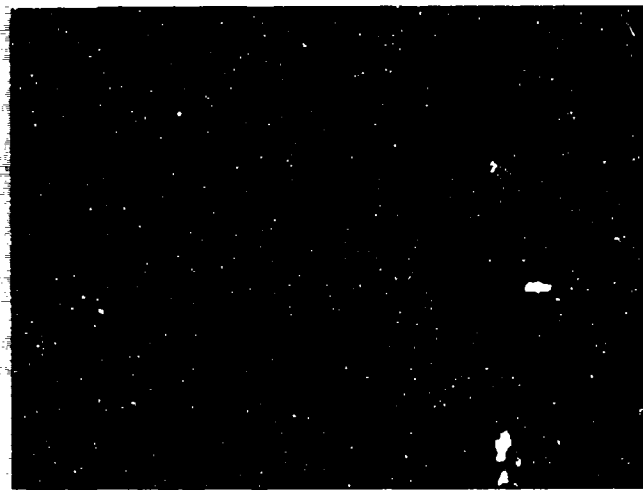

(g)



(h)

Figure 12 (Contd): Representative photographs of CRO traces. The resistances are the primer resistances measured before insertion of the cartridge case in the breech block. The voltages are the test voltages. (a) Resistance = 20.4 k Ω . Voltage = 1 kV. (b) Resistance = 22.3 k Ω . Voltage = 2.6 kV. (c) Resistance = 27.5 k Ω . Voltage = 3.4 kV. (d) Resistance = 6.5 k Ω . Voltage = 4.2 kV. (e) Resistance = 57.5 k Ω . Voltage = 5.8 kV. (f) Resistance = 30.8 k Ω . Voltage = 7.4 kV. (g) Resistance = 23.2 k Ω . Voltage = 9 kV. (h) Resistance = 15.4 k Ω . Voltage = 10.6 kV.

4. Conclusions and Recommendations

We have successfully concluded a series of firings and analyses to determine the electrostatic discharge characteristics of the M52A3B1 primer. The Bruceton, probit, logit and AMCR methods have been used to analyse the data. The probit and logit analyses yielded the most realistic results and the results of those analyses will be quoted here. The emphasis has been on safety. The probit analysis predicts that the voltage 0.1% function level estimate and no-fire threshold (using a single-sided 95% confidence interval) are 1142 V and 799 V respectively. The corresponding values for the logit analysis are 781 V and 477 V. The 0.1% FL and NFT energy were estimated as 98 μ J and 48 μ J by probit analysis. The corresponding values for the logit analysis are 46 μ J and 17 μ J. By comparison the NFT for DC initiation has been quoted as 2.2 μ J or 5 μ J.

We have, however, taken no account of the series resistance of the discharge network in determining the energy input to the primer. Taking this into account would reduce the obtained NFT values. It would be useful if the voltage across the primer could be measured directly as a function of time. Even without a precise knowledge of the energy input to the primer, the results obtained in this work are useful in determining the hazard level of the M52A3B1 primer (in terms of discharge voltage). This is because the data in this report have been obtained from a simulator which replicates actual human discharge. Further, this discharge has been designed to reproduce what is considered a worst-case scenario involving discharge from a hand-held metal object.

It would also be useful if future work could be conducted to elucidate the effects of factors such as temperature, humidity and barometric pressure on the discharge.

Another important factor is the approach speed of the electrode bearing the electrostatic charge. It has been shown [13] that a correlation exists between electrode approach speed and the rising slope of the discharge pulse. This phenomenon requires further investigation in the context of this work. This is relevant because, in practice, there will be a variation in the approach speed of e.g. a person's hand to the ordnance under ESD threat.

The different values obtained for the 0.1% FL and NFT when they are calculated by different methods is also a problem that requires further investigation.

5. References

1. Spear, R. J. and Redman, L. D. (1984). *A Study of the Feasibility of Developing a Low Sensitivity CC Cap for Raufoss 20 mm Ammunition* (MRL Report MRL-R-948). Maribyrnong, Vic.: Materials Research Laboratory.
2. Bentley, J.R. (1986). *Conducting Composition Primers for 105 mm Tank Ammunition (U)* (MRL Report MRL-R-1001) (Restricted). Maribyrnong, Vic.: Materials Research Laboratory.
3. MIL-I-23659C. *Military Specification. Initiators, Electric, General Design Specification for.* August 1972.

4. Richman, P. (1985). *An ESD Circuit Model with Initial Spikes to Duplicate Discharges from Hands with Metal Objects*, Application Note AN 150, KeyTek Instrument Corp.
5. Culling, H.P. (1953). *Statistical Methods Appropriate for Evaluation of Fuze Explosive-Train Safety and Reliability* (NAVORD Report 2101). Whiteoak, Maryland: US Naval Ordnance Laboratory.
6. Finney, D. J. (1971). *Probit Analysis*, 3rd edition, Cambridge University Press.
7. AMC Regulation AMCR 715-505. *Ammunition Ballistic Acceptance Test Methods Volume 8. Test Procedures for 20 mm Cartridges*. October 1964.
8. Billon, H. Unpublished work.
9. Lam, C. (1993) *The application of a statistical analysis software package to explosive testing* (MRL Technical Report MRL-TR-93-42). Maribyrnong, Vic.: Materials Research Laboratory.
10. Billon, H. Unpublished work.
11. Ordnance Board Proceeding 42413, 11 March 1986. UK RESTRICTED.
12. Bentley, J. et al. *Functioning Characteristics of the MRL MK2 CC Primer*. MRL internal report.
13. Daout, B. and Ryser, H. (1987). *The Correlation of Rising Slope and Speed of Approach in ESD Tests*, 7th International Symposium on Electromagnetic Compatibility, Zürich, Switzerland.

Table 1: Results of Brucceton firings for M52A3B1 primers

Temperature: 33°C, Relative Humidity: 37%

Shot No	Primer Resistance (k Ω)	Rig Resistance (k Ω) *	Test Voltage (kV)	Result
1	16.84	-	5	NF
2	57.7	67.0	7	NF
3	21.1	21.6	9	F
4	29.6	28.4	7	F
5	16.2	16.1	5	NF
6	77.2	77.3	7	F
7	11.3	11.3	5	F
8	20.1	20.5	3	NF
9	2.1	2.3	5	F
10	34.9	33.7	3	NF
11	41.5	27.7	5	F
12	42.5	41.0	3	F
13	4.8	4.8	1	NF
14	18.0	17.8	3	NF
15	49.6	46.5	5	F
16	28.7	28.5	3	F
17	10.3	10.1	1	NF
18	23.1	23.5	3	NF
19	33.1	32.7	5	F
20	20.0	30.1	3	NF

Table 2: Random test V=1.0 kV

First 2 shots: Temperature: 32.5°C, Relative humidity: 52%.

Other shots: Temperature: 29°C, Relative humidity: 32%.

Shot No	Primer Resistance (k Ω)	Rig Resistance (k Ω) *	Result
1	16.1	15.9	NF
2	19.4	19.3	NF
3	14.1	13.2	NF
4	14.6	14.3	NF
5	35.3	35.2	NF
6	13.2	13.2	NF
7	13.1	12.8	NF
8	20.4	17.6	NF
9	10.5	10.4	NF
10	53.9	33.8	NF
11	11.8	8.7	NF
12	8.3	7.2	NF
13	13.2	5.3	NF
14	10.1	9.6	NF
15	8.8	7.7	NF
16	6.9	6.6	NF
17	23.6	21.7	NF
18	16.3	11.8	NF
19	24.9	25.0	NF
20	24.0	15.0	NF

Table 3: *Rundown test V = 2.6 kV*

Temperature: 32.5 °C, Relative humidity: 52%.

Shot No.	Primer Resistance (k Ω)	Rig Resistance (k Ω) *	Result
1	10.8	11.0	F
2	83.5	73.9	NF
3	17.6	12.3	F
4	11.3	7.8	NF
5	24.7	23.5	NF
6	39.9	39.9	NF
7	5.8	5.8	NF
8	13.7	14.3	NF
9	42.6	47.7	NF
10	8.4	7.9	NF
11	6.7	5.2	NF
12	18.7	20.1	NF
13	31.2	27.3	NF
14	30.0	26.9	NF
15	22.3	22.2	NF
16	54.9	53.5	NF
17	27.4	29.6	NF
18	10.3	10.6	NF
19	19.0	20.5	NF
20	58.0	56.5	NF

Table 4: *Rundown test V = 3.4 kV*

Temperature: 36 °C, Relative humidity: 29%.

Shot No.	Primer Resistance (k Ω)	Rig Resistance (k Ω) *	Result
1	33.0	32.9	NF
2	268.8	214	NF
3	52.3	46.1	NF
4	9.2	7.9	NF
5	209.5	151.2	F
6	35.3	35.3	NF
7	15.0	14.7	NF
8	9.3	9.0	F
9	162.8	117.8	NF
10	12.6	12.5	NF
11	19.2	18.9	NF
12	13.2	12.6	F
13	17.7	23.9	NF
14	27.5	27.2	NF
15	18.3	17.9	NF
16	22.4	22.1	NF
17	21.0	20.1	F
18	5.9	5.7	NF
19	7.4	7.2	NF
20	13.9	13.8	NF

Table 5: Rundown test $V = 4.2 \text{ kV}$ (initial 20 shots)

Temperature: 29°C , Relative humidity: 40%.

Shot No.	Primer Resistance ($\text{k}\Omega$)	Rig Resistance ($\text{k}\Omega$) *	Result
1	31.7	31.4	NF
2	6.5	6.4	F
3	13.3	13.3	F
4	21.9	21.9	NF
5	130.3	130.3	F
6	28.5	3.5	F
7	36.8	4.0	F
8	38.4	1.7	F
9	8.2	2.0	NF
10	8.8	4.4	NF
11	28.6	1.8	F
12	12.5	6.7	F
13	53.4	8.0	F
14	14.7	14.7	F
15	15.4	12.5	F
16	10.4	3.5	F
17	18.2	3.7	F
18	17.9	7.8	F
19	14.6	3.1	NF
20	14.8	14.8	F

Table 6: Rundown test $V = 4.2 \text{ kV}$ (second lot of 20 shots)

Temperature: 32°C , Relative humidity: 44%.

Shot No.	Primer Resistance ($\text{k}\Omega$)	Rig Resistance ($\text{k}\Omega$) *	Result
1	5.4	5.2	F
2	15.1	15.1	NF
3	5.0	5.0	NF
4	19.4	19.4	F
5	15.7	15.4	F
6	7.4	7.2	F
7	19.2	18.9	F
8	15.3	15.3	NF
9	257.0	204.0	F
10	9.6	7.9	F
11	20.0	20.0	NF
12	12.3	12.4	NF
13	162.5	163.1	F
14	24.9	24.9	NF
15	61.5	61.5	NF
16	10.4	10.4	NF
17	117.0	117.8	F
18	9.6	9.7	NF
19	40.2	40.1	F
20	15.0	13.2	NF

Table 7: Rundown test $V = 5.8 \text{ kV}$

Temperature: 29 °C, Relative humidity: 40%

Shot No	Primer Resistance (k Ω)	Rig Resistance (k Ω) *	Result
1	14.6	14.4	F
2	10.3	10.2	F
3	11.8	11.7	F
4	10.6	0.0	NF
5	8.4	8.5	NF
6	4.3	3.0	F
7	16.9	0.0	F
8	10.0	0.0	F
9	266.0	263.0	NF
10	19.9	1.0	F
11	20.6	20.9	F
12	13.2	13.0	F
13	17.5	4.5	F
14	3.6	5.0	F
15	57.5	3.0	F
16	21.1	0.0	F
17	16.5	3.7	F
18	22.3	1.4	F
19	12.4	0.0	NF
20	18.0	1.5	NF

Table 8: Rundown test $V = 7.4 \text{ kV}$

For the first 8 shots: Temperature: 29 °C, Relative humidity: 40%

For the other shots: Temperature: 33 °C, Relative humidity: 30%

Shot No	Primer Resistance (k Ω)	Rig Resistance (k Ω) *	Result
1	54.8	0.0	F
2	10.9	2.2	F
3	18.1	17.8	F
4	166.0	165.4	F
5	7.3	7.0	F
6	15.6	11.6	NF
7	30.8	2.1	F
8	44.9	45.3	F
9	9.8	7.4	F
10	8.7	8.7	NF
11	31.5	31.2	F
12	9.6	9.5	F
13	12.0	10.9	F
14	18.9	19.4	F
15	43.8	43.5	F
16	6.5	6.4	F
17	2.7	2.6	F
18	3.2	3.3	F
19	13.2	13.3	F
20	19.2	19.5	F

Table 9: Rundown test $V = 9.0 \text{ kV}$

Temperature: 33°C , Relative humidity: 30%

Shot No.	Primer Resistance (k Ω)	Rig Resistance (k Ω) *	Result
1	17.3	16.7	NE
2	17.6	16.6	F
3	9.9	10.2	F
4	49.3	47.8	F
5	35.6	35.9	F
6	7.2	7.2	F
7	85.0	84.5	F
8	17.2	17.2	F
9	23.6	22.9	F
10	6.6	6.7	F
11	12.6	12.6	F
12	23.2	23.4	F
13	12.3	12.2	F
14	23.2	22.5	F
15	23.6	23.5	F
16	8.4	8.3	F
17	15.6	17.7	F
18	44.7	41.3	F
19	27.3	27.1	F
20	18.1	14.6	F

Table 10: Rundown test $V = 10.0 \text{ kV}$

Temperature: 33°C , Relative humidity: 30%

Shot No.	Primer Resistance (k Ω)	Rig Resistance (k Ω) *	Result
1	52.7	52.6	F
2	8.2	8.2	F
3	6.4	6.3	F
4	144.0	203.0	F
5	12.3	13.1	F
6	18.0	18.3	F
7	30.0	30.1	F
8	65.0	64.7	F
9	11.9	11.9	F
10	26.1	25.8	F
11	9.1	9.2	F
12	18.4	19.7	F
13	166.0	166.7	F
14	15.4	15.4	F
15	13.7	13.8	F
16	10.3	10.6	F
17	11.8	12.1	F
18	24.4	24.8	F
19	29.7	30.5	F
20	7.2	7.2	F

* The rig resistance was measured after the cartridge case was inserted into the breech block. See section 2.3 for details

Table 11: Probit analysis results assuming the voltage sensitivity is log-normally distributed

Logarithmic Voltage Mean	3.620
Logarithmic Voltage Standard Deviation	0.182
Voltage 0.1% Function Level Estimate	1142 V
Voltage No-Fire Threshold Estimate (0.1%, 95% Confidence)	799 V

Table 12: Logit analysis results assuming the voltage sensitivity is log-logistically distributed

Logarithmic Voltage Mean	3.616
Logarithmic Voltage Standard Deviation	0.190
Voltage 0.1% Function Level Estimate	781 V
Voltage No-Fire Threshold Estimate (0.1%, 95% Confidence)	577 V

SECURITY CLASSIFICATION OF THIS PAGE

UNCLASSIFIED

REPORT NO.
DSTO-TR-0029

AR NO.
AR-008-567

REPORT SECURITY CLASSIFICATION
Unclassified

TITLE

Electrostatic testing of M52A3B1 primers

AUTHOR(S)
H.H. Billon and L. Redman

CORPORATE AUTHOR
DSTO Aeronautical and Maritime Research Laboratory
GPO Box 4331
Melbourne Victoria 3001

REPORT DATE
June 1994

TASK NO.
DST 91/178

SPONSOR
DSTO

FILE NO.
G6/4/8-4462

REFERENCES
13

PAGES
30

CLASSIFICATION/LIMITATION REVIEW DATE

CLASSIFICATION/RELEASE AUTHORITY
Chief, Explosives Ordnance Division

SECONDARY DISTRIBUTION

Approved for public release

ANNOUNCEMENT

Announcement of this report is unlimited

KEYWORDS

Electroexplosive devices
Primers

Electrostatic initiation

Conducting compositions

ABSTRACT

Electrostatic sensitivity tests were conducted on M52A3B1 primers using an electrostatic discharge (ESD) gun to simulate human static discharge. The data were analysed by the Bruceton, probit, logit and AMCR techniques. The no-fire threshold (NFT) for electrostatic discharge was determined.

SECURITY CLASSIFICATION OF THIS PAGE

UNCLASSIFIED

Electrostatic Testing of M52A3B1 Primers

H.H. Billon and L. Redman

(MRL-TR-93-37)

DISTRIBUTION LIST

Director, MRL
Chief, Explosives Ordnance Division
Dr B.W. Thorpe
Mr H.H. Billon
Mr L. Redman
MRL Information Services

Chief Defence Scientist (for CDS, FASSP, ASSCM)	1 copy only
Director (for Library), Aeronautical Research Laboratory	
Head, Information Centre, Defence Intelligence Organisation	
OIC Technical Reports Centre, Defence Central Library	
Officer in Charge, Document Exchange Centre	8 copies
Army Scientific Adviser, Russell Offices	
Air Force Scientific Adviser, Russell Offices	
Navy Scientific Adviser - data sheet only	
Scientific Adviser, Defence Central	
Director General Force Development (Land)	
Senior Librarian, Main Library DSTOS	
Librarian - MRL Sydney - data sheet only	
Librarian, H Block	
Serials Section (M List), Deakin University Library, Deakin University, Geelong 3217	
NAPOC QWG Engineer NBCD c/- DENGRS-A, HQ Engineer Centre, Liverpool Military Area, NSW 2174	
Librarian, Australian Defence Force Academy	
Counsellor, Defence Science, Embassy of Australia - data sheet only	
Counsellor, Defence Science, Australian High Commission - data sheet only	
Scientific Adviser to DSTC Malaysia, c/- Defence Adviser - data sheet only	
Scientific Adviser to MRDC Thailand, c/- Defence Attache - data sheet only	
Head of Staff, British Defence Research and Supply Staff (Australia)	
NASA Senior Scientific Representative in Australia	
INSPEC: Acquisitions Section Institution of Electrical Engineers	
Head Librarian, Australian Nuclear Science and Technology Organisation	
Senior Librarian, Hargrave Library, Monash University	
Library - Exchange Desk, National Institute of Standards and Technology, US	
Exchange Section, British Library Document Supply Centre	
Periodicals Recording Section, Science Reference and Information Service, UK	
Library, Chemical Abstracts Reference Service	
Engineering Societies Library, US	
Documents Librarian, The Center for Research Libraries, US	

Electrostatic Testing of M52A3B1 Primers

H.H. Billon and L. Redman

(DSTO-TR-0029)

DISTRIBUTION LIST

Director, AMRL
Chief, Explosives Ordnance Division
Dr B.W. Thorpe
Mr H.H. Billon
Mr L. Redman
AMRL Library - Maribyrnong
AMRL Library - Fishermens Bend

Chief Defence Scientist (for CDS, FASSP, ASSCM)

1 copy only

Director, SERL

Head, Information Centre, Defence Intelligence Organisation

OIC Technical Reports Centre, Defence Central Library

Officer in Charge, Document Exchange Centre

8 copies

Army Scientific Adviser, Russell Offices

Air Force Scientific Adviser, Russell Offices

Navy Scientific Adviser - data sheet only

Scientific Adviser, Defence Central

Director General Force Development (Land)

Senior Librarian, Main Library DSTOS

Librarian - AMRL Sydney - data sheet only

Librarian, H Block

Serials Section (M List), Deakin University Library, Deakin University, Geelong 3217

NAPOC QWG Engineer NBCD c/- DENGERS-A, HQ Engineer Centre, Liverpool

Military Area, NSW 2174

Librarian, Australian Defence Force Academy

Counsellor, Defence Science, Embassy of Australia - data sheet only

Counsellor, Defence Science, Australian High Commission - data sheet only

Scientific Adviser to DSTC Malaysia, c/- Defence Adviser - data sheet only

Scientific Adviser to MRDC Thailand, c/- Defence Attache - data sheet only

Head of Staff, British Defence Research and Supply Staff (Australia)

NASA Senior Scientific Representative in Australia

INSPEC: Acquisitions Section Institution of Electrical Engineers

Head Librarian, Australian Nuclear Science and Technology Organisation

Senior Librarian, Hargrave Library, Monash University

Library - Exchange Desk, National Institute of Standards and Technology, US

Exchange Section, British Library Document Supply Centre

Periodicals Recording Section, Science Reference and Information Service, UK

Library, Chemical Abstracts Reference Service

Engineering Societies Library, US

Documents Librarian, The Center for Research Libraries, US